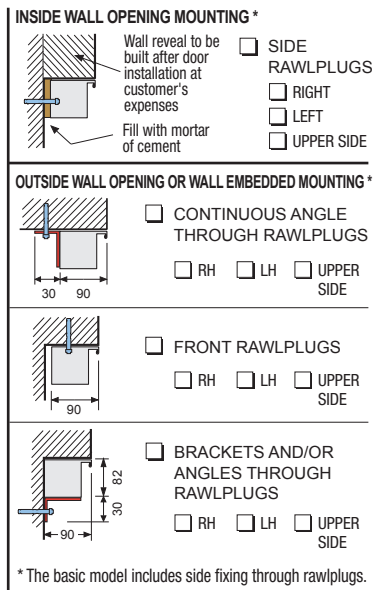
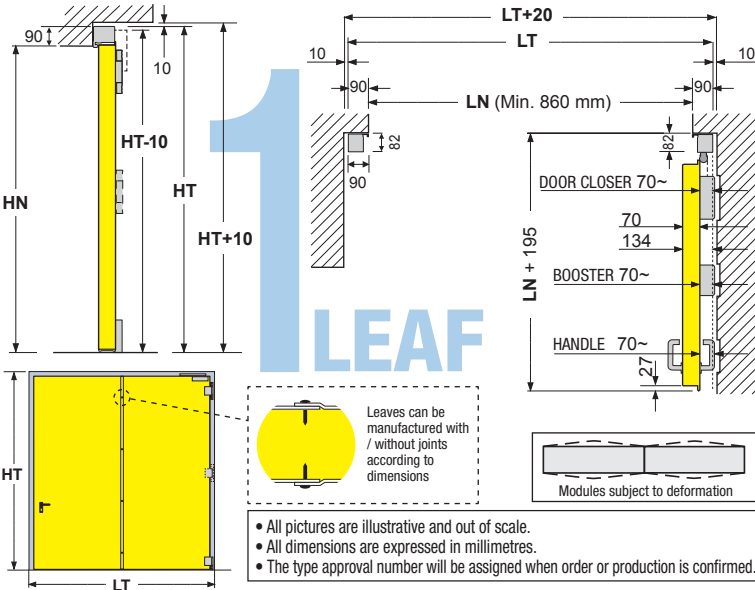


QUOTATION ORDER

BIG ROTATION OPENING DOOR FIRE FIXING® REI 120 1 LEAF



Customer Date
Item code Page n° of pages



NOTES:

- Elements providing fire compartmentation. Do not use inappropriately.
- Mounting to be carried out by specialized personnel only.
- Do not install in places subject to direct air flow.
- Mount only on flat plumb vertical structures or compartments suitable to bear the heavy radial load
- Dangerous closing during rotation caused by "boom effect".
- Precautions during use and risk analysis are to be defined by the customer.
- For special requirements, please indicate available spaces and contact our Technical Office.

- All pictures are illustrative and out of scale.
- All dimensions are expressed in millimetres.
- The type approval number will be assigned when order or production is confirmed.

N°	DIM.	LT	mm	x	HT	mm	n°	Price	€	%	Net price	€	Amount	€
		LN	mm	x	HN	mm								
	OPENING PULL	<input type="checkbox"/> LEFT		<input type="checkbox"/> RIGHT										
BRD FIRE FIXING® REI 120 includes the RAL 7035 prime coat finishing.														
DOOR CLOSER														
BOOSTER (Coil spring) max opening 120° <input type="checkbox"/> 80N <input type="checkbox"/> 160N														
ELECTROMAGNET 24 V d.c. CC 1400N														
NC RELEASE BUTTON														
1 Firux® I.S.D. SUPPLIER + 2 THERMAL DETECTORS Have to be installed on doors without any centralized monitoring system (choice to be preferred).														
PANIC BAR (handle center at 1050 mm from ffl) <input type="checkbox"/> SLASH <input type="checkbox"/> TWIST <input type="checkbox"/> STAINLESS STEEL SLASH <input type="checkbox"/> STAINLESS STEEL TWIST														
CONTINUOUS ANGLE FOR OUTSIDE WALL OPENING MOUNTING THROUGH RAWLPLUGS mm														
BRACKETS FOR INSIDE WALL OPENING MOUNTING THROUGH BRACKETS														
SPECIAL GAP COVER PROFILE mm														
ONE WAY METAL PACKAGING IF LT/HT > 2600 mm														
RAL OVEN-HARDENED SATIN FINISH														
If HT or LT > 2650 mm only apply RAL 7035 off line prime coat.														
TOTAL € (VAT excluded)														

General and particular sales conditions including delivery times are given in annex form of offer or order confirmation. Excluding transportation, unloading from truck or container, installation, destination taxes and charges. Packing included. Every single order to become economically and technically engaging must be confirmed in writing by Endoors srl. since before the formalization of the order the product or documentation may have changed. Incomplete forms to become effective must be completed both for offers and orders.
INCOMPLETE FORMS WILL NOT BE PROCESSED.
The manufacturer reserves the right to modify the product and all relevant technical documents without notice. Please verify that the present form is valid when filling it out.

Special notes

Seal and signature for acceptance and confirmation of order