



QUOTATION     ORDER    **MODULAR SLIDING DOOR FIRE FIXING® REI 120 1 LEAF**

Customer ..... Date .....  
Item code ..... Page n° ..... of pages .....


**OPPOSITE SIDE COUNTER-WEIGHT MODEL**

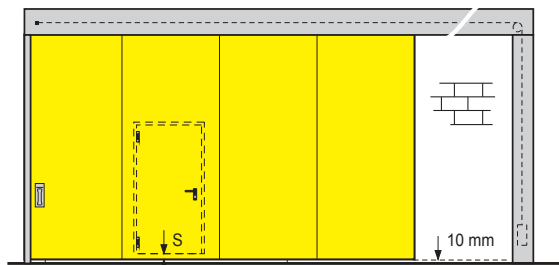


- CONCRETE BEAM     BEAM WITHIN HEIGHT

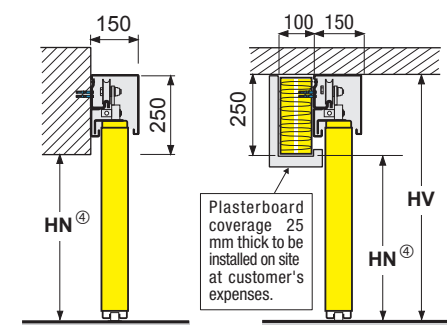


- OPPOSITE SIDE COUNTER-WEIGHT

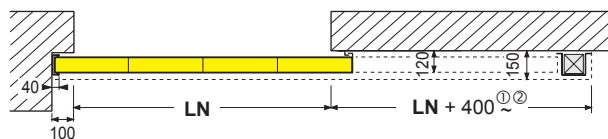

- OPPOSITE SIDE AND OFF AXIS COUNTER-WEIGHT

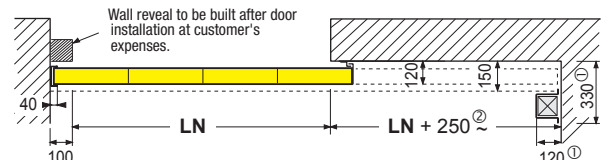


- SPECIAL DOORSTOP



- ① Check door sizes and/or contact our Technical Office for overall dimensions
- ② Rear overall dimensions increase by 140 mm in case an electromagnet CC 2800N is present.
- ③ Contact our Technical Office to verify feasibility.
- ④ If HN > 7150 the upper and lower stiffening structure dimensions may differ from usual ones and the handle may be placed higher on the door.
- ⑤ Verify feasibility if LN > 6000

**NOTES:**  
- Elements providing fire compartmentation. Do not use inappropriately.  
- Do not install in places subject to direct air flow.  
- The choice of door retaining system through electromagnet or thermal fuse is to the customer's charge and risk.  
- Mounting to be carried out by specialized personnel only.  
- Mount only on flat plumb vertical structures or compartments.  
- For special requirements, please indicate available spaces and contact our Technical Office.  
- Precautions during use and risk analysis are to be defined by the customer.

- All pictures are illustrative and out of scale.
- All dimensions are expressed in millimetres.
- The type approval number will be assigned when order or production is confirmed.



N°	DIM. LN	mm	x HN	mm	n°	Price	%	Net price	Amount
						€		€	€
Door retaining system through: <input type="checkbox"/> Electromagnet <input type="checkbox"/> Thermal fuse					The choice of the fuse may impair the functioning of the door.				
OPENING: <input type="checkbox"/> LEFT <input type="checkbox"/> RIGHT									
The MODULAR SLIDING DOOR FIRE FIXING® REI 120 includes sliding guide and prime coat RAL 7035. It does not include the door lock									
SAM SHOCK ABSORBER									
V.T. VISCOTROLLER (CRUISE CONTROL)									
ELECTROMAGNET 24 V d.c. <input type="checkbox"/> CC 600N <input type="checkbox"/> CC 1400N <input type="checkbox"/> CC 2800N ②									
NC RELEASE BUTTON									
1 Firux® I.S.D. SUPPLIER + 2 THERMAL DETECTORS    Have to be installed on doors without any centralized monitoring system (choice to be preferred).									
NIGHT LOCK (verify feasibility if LN < 700 mm)									
SIZES <input type="checkbox"/> NORMAL <input type="checkbox"/> SP ① (350 mm) <input type="checkbox"/> R ① (MIN. 350 mm)									
BEAM WITHIN HEIGHT 250x100x ..... mm, HV ..... mm									
COUNTER-WEIGHT <input type="checkbox"/> OPPOSITE SIDE ⑤ <input type="checkbox"/> OFF AXIS									
SPECIAL DOORSTOP									
PEDESTRIAN DOOR The door is usually placed on the 1st module after the handle-module. Unless differently specified. The hand of the pedestrian door ought to be chosen according to the hand of the sliding element.									
PUSH: <input type="checkbox"/> RH <input type="checkbox"/> LH <input type="checkbox"/> RH <input type="checkbox"/> LH									
PULL: <input type="checkbox"/> RH <input type="checkbox"/> LH <input type="checkbox"/> RH <input type="checkbox"/> LH									
LNp <input type="checkbox"/> 850 mm <input type="checkbox"/> 1140 mm    HNp 2090 (HN min 2250 if S=92/32 mm and HN min 2500 if S=0)									
<input type="checkbox"/> STANDARD THRESHOLD S= 92 mm <input type="checkbox"/> DEPRESSED THRESHOLD S= 32 mm <input type="checkbox"/> NO THRESHOLD ③ S= 0 mm									
SPACER (60 mm) <input type="checkbox"/> HORIZONTAL <input type="checkbox"/> VERTICAL * Compulsory with pull-to-exit pedestrian door and panic bar or with push-to-exit pedestrian door in general									
PANIC BAR <input type="checkbox"/> SLASH <input type="checkbox"/> STAINLESS STEEL SLASH									
RAL OVEN HARDENED SATIN FINISH .....									
<b>TOTAL € (VAT excluded)</b>									

General and particular sales conditions including delivery times are given in annex form of offer or order confirmation. Excluding transportation, unloading from truck or container, installation, destination taxes and charges. Packing included. Every single order to become economically and technically engaging must be confirmed in writing by Endoors srl. since before the formalization of the order the product or documentation may have changed. Incomplete forms to become effective must be completed both for offers and orders.

INCOMPLETE FORMS WILL NOT BE PROCESSED.

The manufacturer reserves the right to modify the product and all relevant technical documents without notice. Please verify that the present form is valid when filling it out.

Special notes

Seal and signature for acceptance and confirmation of order